GARED SPORTS MODEL AFRG42 (943)

ALUMINUM FRAME 72" X 42" RECTANGULAR GLASS BACKBOARD

The AFRG42 backboard shall be fabricated with an aluminum frame constructed of .200 extruded "F" channel with steel corner brackets. All steel components shall be powder coated with a durable gray finish. Aluminum-capped frame will not be acceptable. Manufacturer of backboard shall have over ten years experience. Backboard shall meet NCAA and high school requirements.

Glass shall be ½" in thickness and fully tempered with white border and target lines permanently fused onto the surface. Vinyl shock absorbing material insulates the glass from the frame. Goal mounting holes shall be on standard 5" horizontal and 4" vertical centers. Acrylic cushioning pad shall be used between steel mounting plate and glass to protect against possible breakage.

ACCESSORIES

RECOMMENDED GOALS
Breakaway with positive lock mechanism, 2000+ Collegiate (806)
Regular breakaway, 1000 Scholastic (829)
Regular Stationary, 39WO Institutional (801)
Heavy duty Stationary, 240 Super Goal (845)

BANK PADDING
See accessories section in Gared Sports specification manual.

Subject to design change and current manufacturing practices.
Revised July 1, 2005 ©1999 Gared Sports

NOTE:

BACKBOARD THICKNESS - 2.25 INCHES

MATERIAL - 0.50" THICK TEMPERED GLASS

FULLY WELDED TUBULAR FRAME

FINISH - NATURAL ALUMINUM WITH GRAY POWDERCOAT ON STEEL COMPONENTS

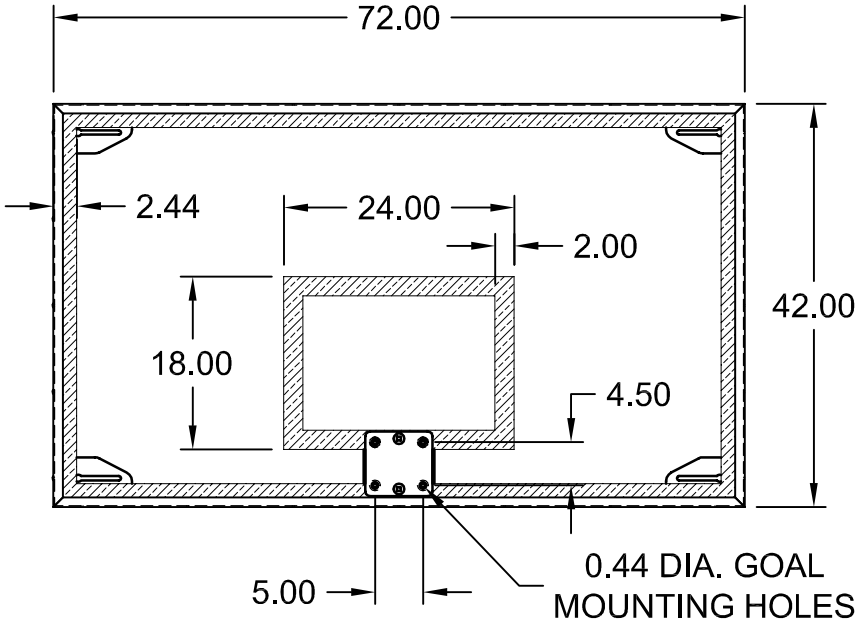

FRONT VIEW

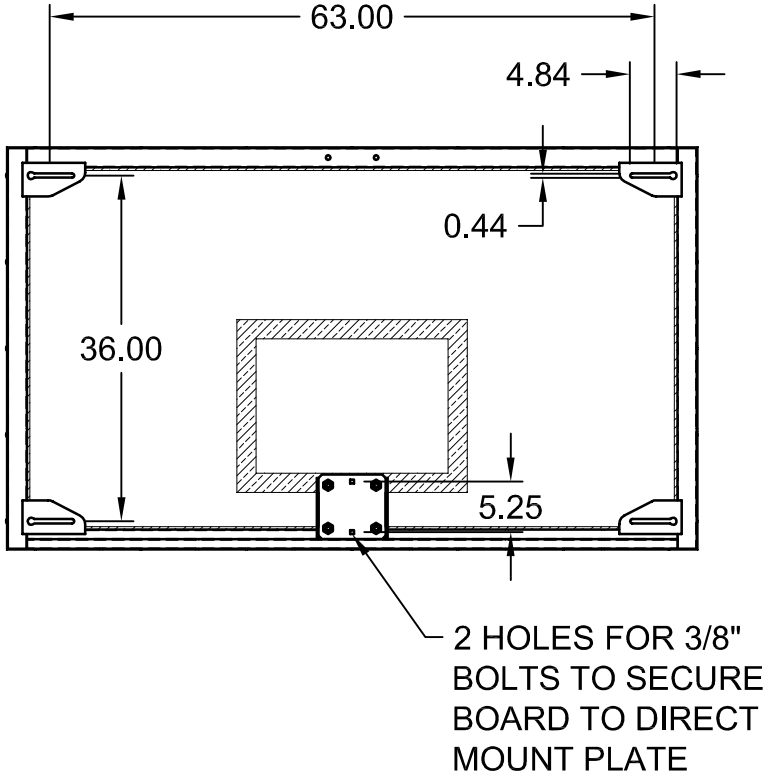

REAR VIEW

REVISION		
REV.	DATE	BY
-	-	-

GARED SPORTS

9200 E. 146th St. Noblesville, IN 46060

THIS DOCUMENT CONTAINS TRADE SECRET AND OTHER MATERIALS WHICH ARE PROTECTED BY CONFIDENTIALITY NOTICE AND AGREEMENT AND BY COPYRIGHT. ANY USE OR COPYING OF THIS DOCUMENT EXCEPT AS AUTHORIZED BY GARED SPORTS IS STRICTLY PROHIBITED.

42" ALUMINUM FRAME GLASS BACKBOARD

DRAWN CONNERLEY	DATE 11/15/06	MATERIAL N/A	
APPROVED CONNERLEY	DATE 11/15/06	FINISH N/A	
FILE LOC. Q:\Final Release\Specifications		DWG. NO. AFRG42-001	REV -
SIZE A	SCALE NONE	SHT. NO. 1 OF 1	PART NO. AFRG42